



T320+
POS Terminal

FEATURES

- Intel® CPU N97, Intel® Core™J4125
- 15" Industrial-grade LCD with PCT
- DDR4 memory
- VESA mount
- Modular options: 2nd Display, MSR (Combo), NFC, VFD

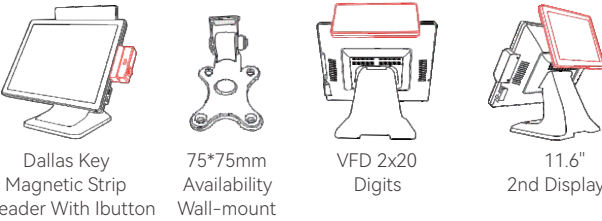

DIMENSIONS

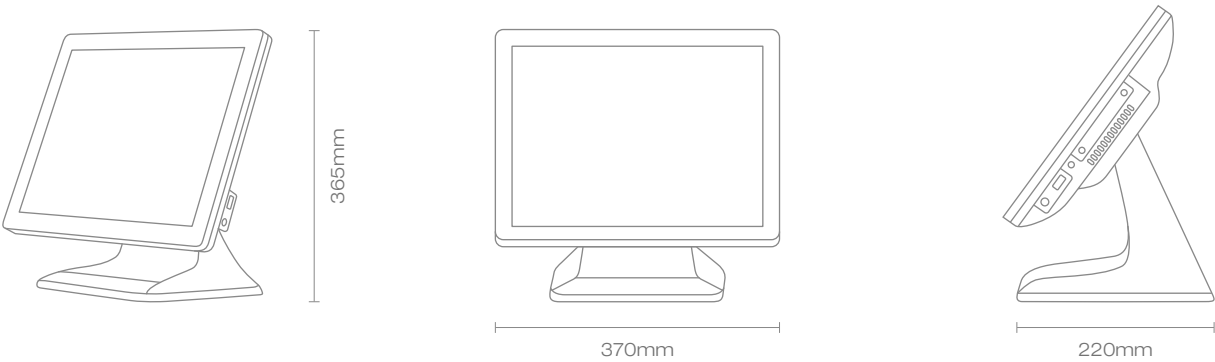

T320+ DATA SHEET

Model		T320+	
CPU		Intel® Processor N97 6M Cache, up to 3.60 GHz, Fan-Free	Intel® Celeron® Processor J4125 4M Cache, up to 2.70 GHz, Fan-Free
System Memory		1 x DDR4, SO-DIMM, 4GB (Max. 16GB)	
Storage	SATA	N/A	
	mSATA/M.2	1 x m.2 2280 128GB (256GB/512GB optional)	1 x mSATA 128G(64G/256G/512G optional)
LCD	Size	15" TFT LCD Panel	
	Brightness	220 ~ 350 cd/m2 (Typ.)	
	Resolution	1024 x 768	
Touch Screen		True-Flat Projected Capacitive Touch	
Tilt Angle		0 ~ 60 degree	
External I/O Port	USB	2 x USB 3.0 + 5 x USB2.0	2 x USB 3.0 +3 x USB 2.0
	Serial Port	1x Serial Port (DB9)	2x Serial Port (DB9)
	VGA	1 x VGA	
	HDMI	1 x HDMI	N/A
	LAN	1 x LAN (10/100/1000Mb)	
	Audio	1 x Mic-In/Speaker-out (Combo Jack)	
	DC-IN	1 x DC-IN	
	DC-Out	1 x DC12V-Max. 2A	
	Power Switch	1 x Power Switch	
Power		External Power Adapter, 12V-5A/60W	
WiFi		M.2 Key-E Slot 2230 WiFi2.4-5G/BT4.0 (optional)	mPCI-E WiFi2.4-5G/BT4.2 (optional)
OS Support		Windows10/11, Linux	
Certification		CE, FCC, UKCA, RoHS	
Environment	Operating Temperature	0°C ~ 40°C	
	Storage Temperature	-15°C ~ 70°C	
	Operating Humidity	20% - 85% RH Non Condensing	
	Storage Humidity	20% - 85% RH Non Condensing	
Dimension (W x D x H)/Weight (N.W.)		404mm x 220mm x 350mm/5.87Kg	
Packing Dimension (W x D x H)/Weight (G.W.)		420mm x 280mm x 485mm/6.5Kg	
Wall Mount		VESA 75mm x 75mm	
Optional	Speaker	2 x 2W Speaker (Optional)	
	MSR (USB)	MSR + iButton (Combo) or MSR + RFID (Combo), USB (VCOM optional), 1/2/3 Track, ISO7810, 7811-1/2/3/4/5, IBM, AAMVA, JIS-2 Standard	
	Scanner	N/A	
	RFID	N/A	
	Customer Display	VFD Display, USB (VCOM), 2x20 Characters	
	2nd Display	VGA, 11.6" (1366*768)	